



1 Expand the two aluminum frames & place side by side.




2 Lower & secure the Locking Bars.

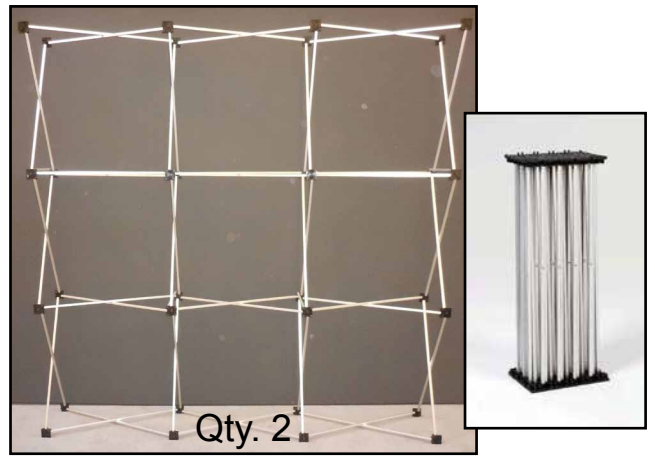


3 Extend Spacer Bars & connect the two frames using screws & hex nuts.

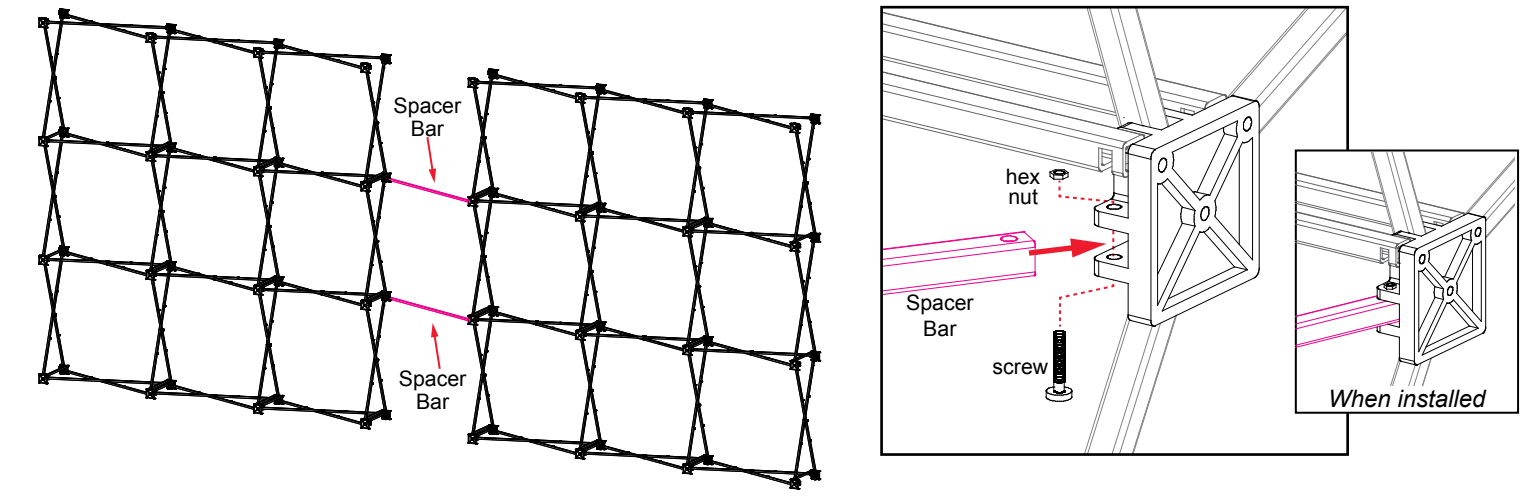

4 Attach rubber rings to graphics, as shown. Hook rings around metal pins.

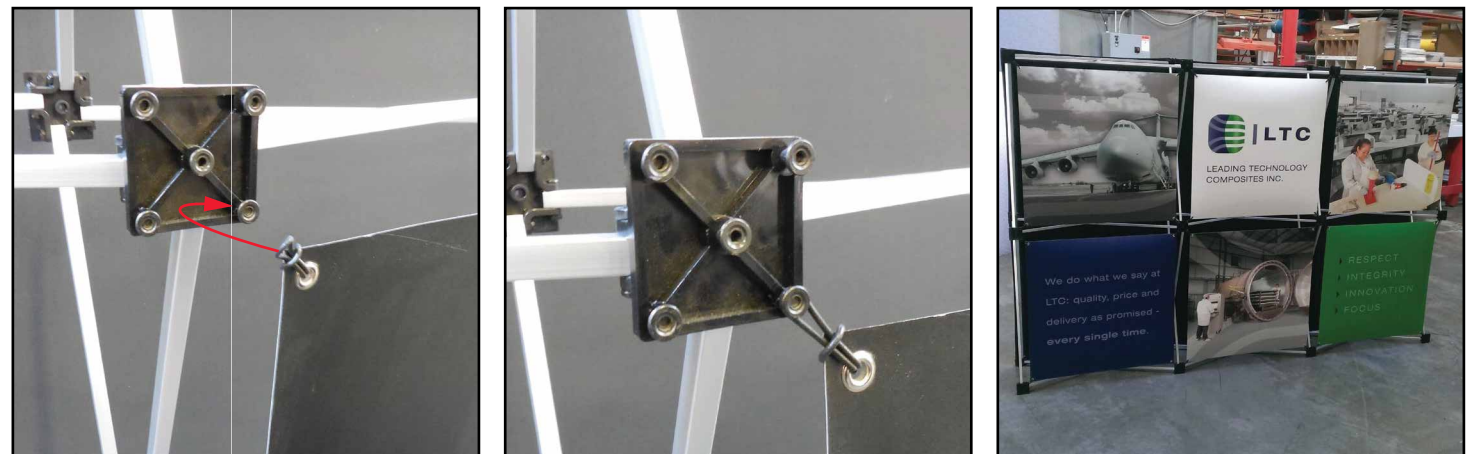


5 Attach lights by sliding the sections together.

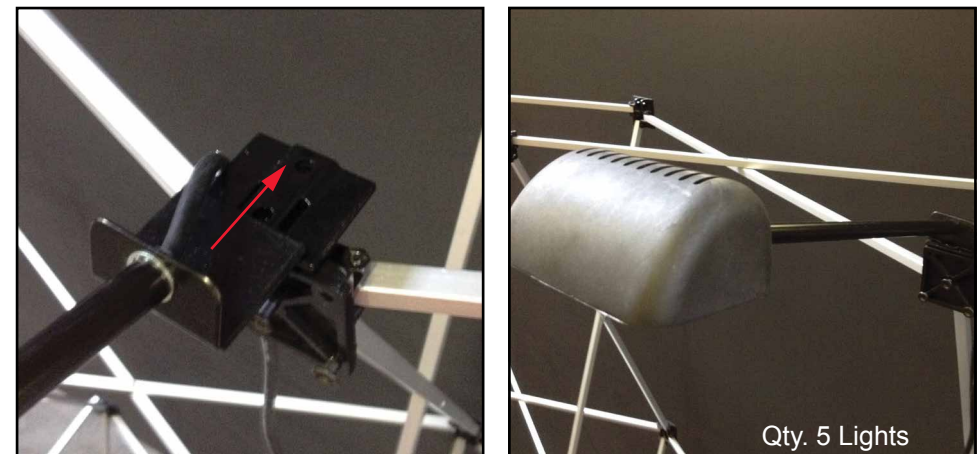

6 Attach Shelves (see opposite page)




7 Attach left & right Fabric Backers to Velcro tabs on back of frames. Then affix middle Backer to Velcro on left & right backers.

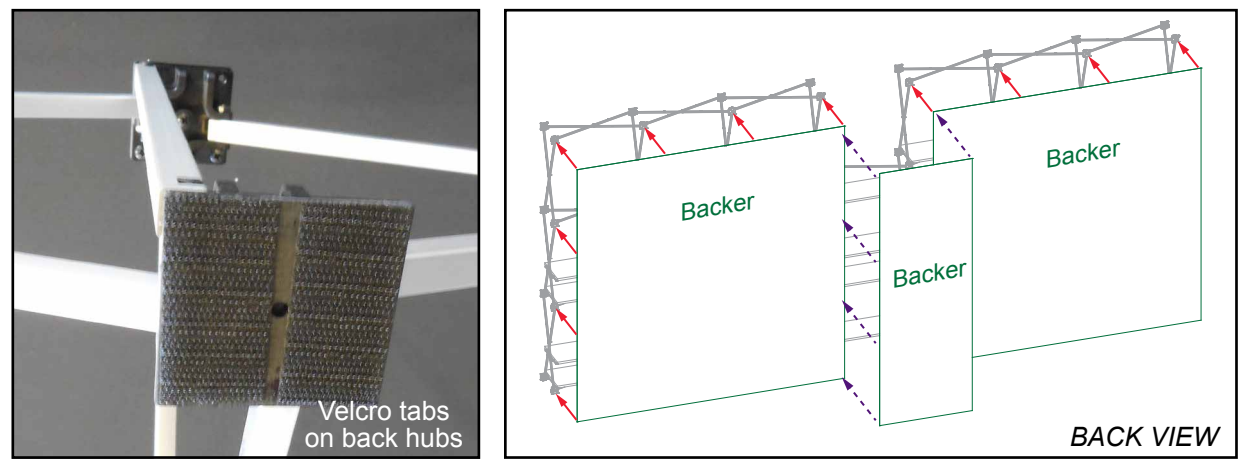

8 Attach Case-to-Counter graphics to cases.




*** Hinged Shelf Support**

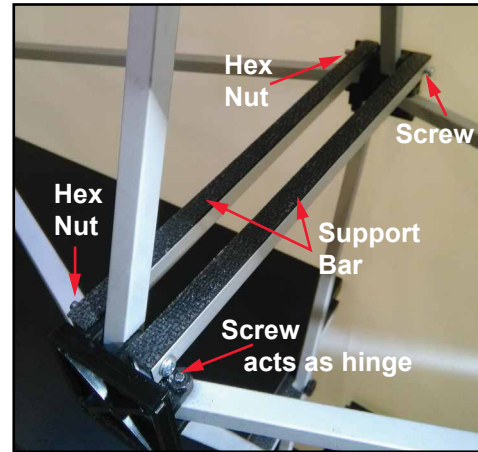

Swing supports down & hook over installed screw on backside of expanded frame.

****Hinged supports & all screws stay permanently attached.**

*** Staggered Shelf Support**

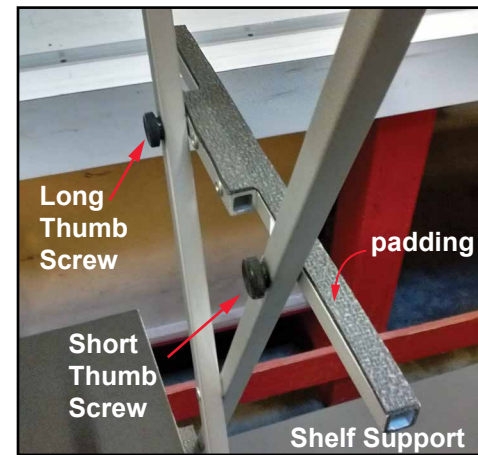

Connect supports to frame using thumb screws.

****Each support has a long thumb screw & a short thumb screw.**

Padding on the support must face upward.

- Steps:
- 1) Attach Hinged Shelf Supports and Staggered Shelf Supports to frame, as shown. See **Hinged Shelf Support** and **Staggered Shelf Support** details.
 - 2) Place shelves onto shelf supports.

