
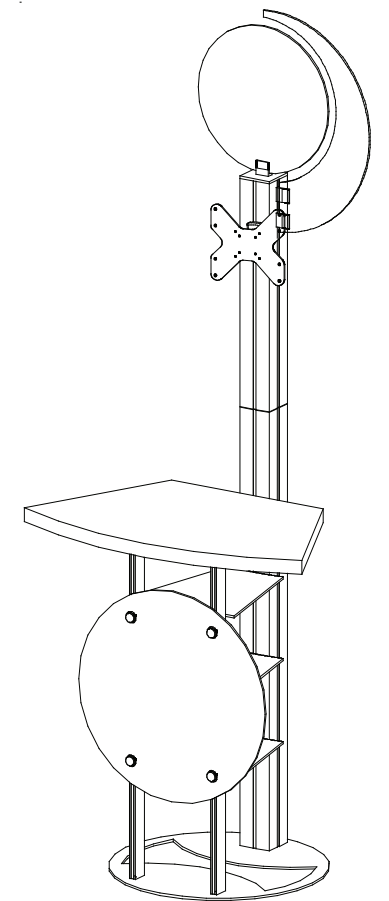
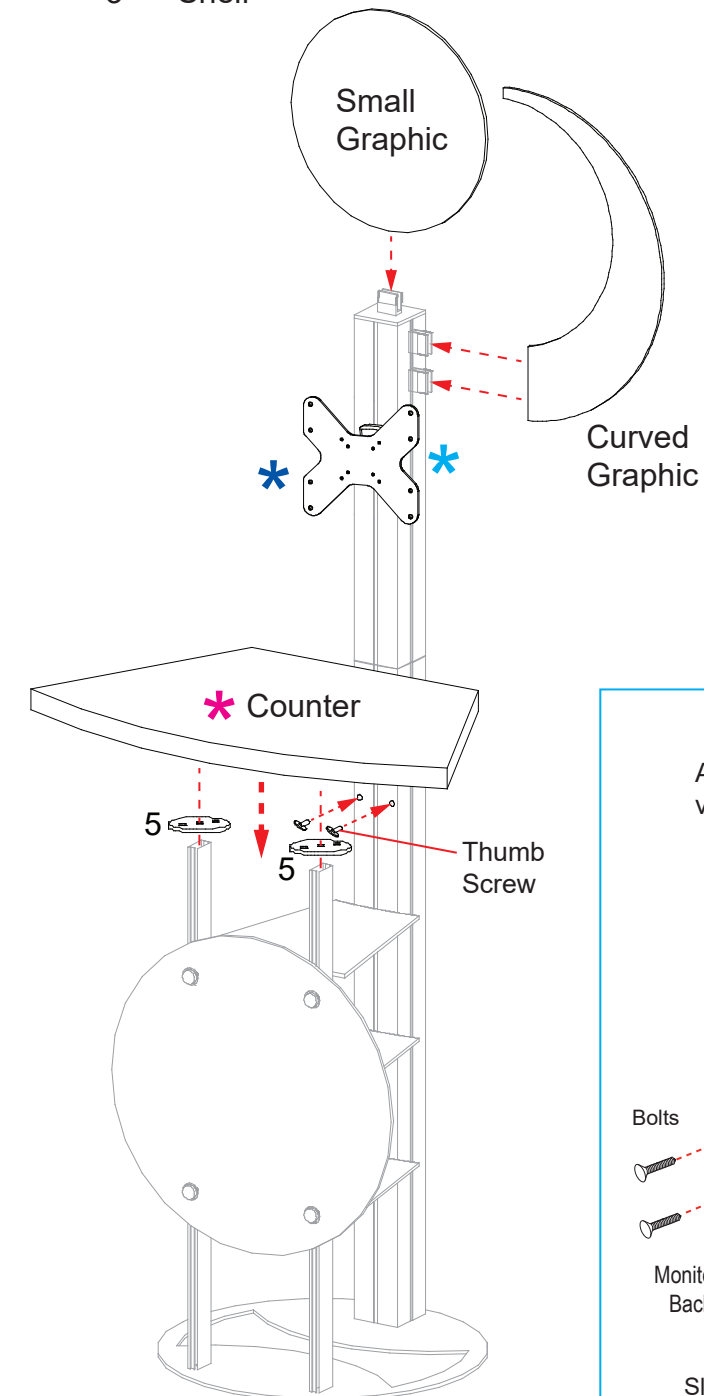
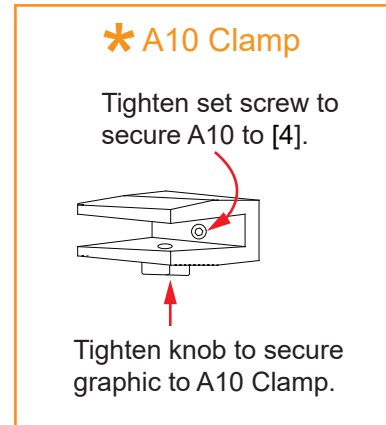
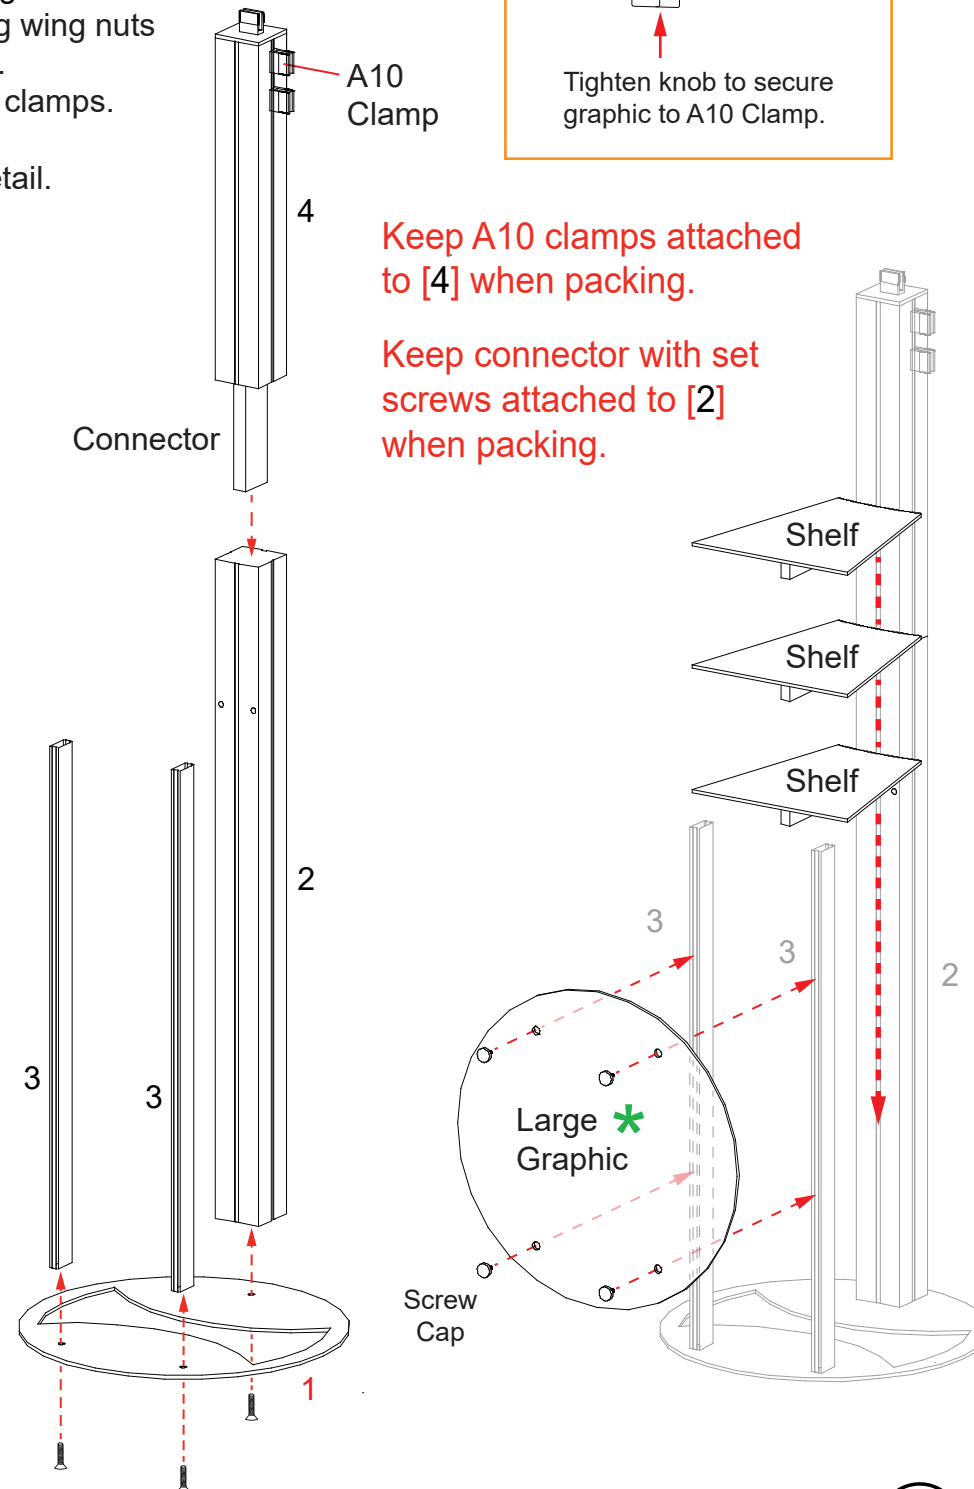
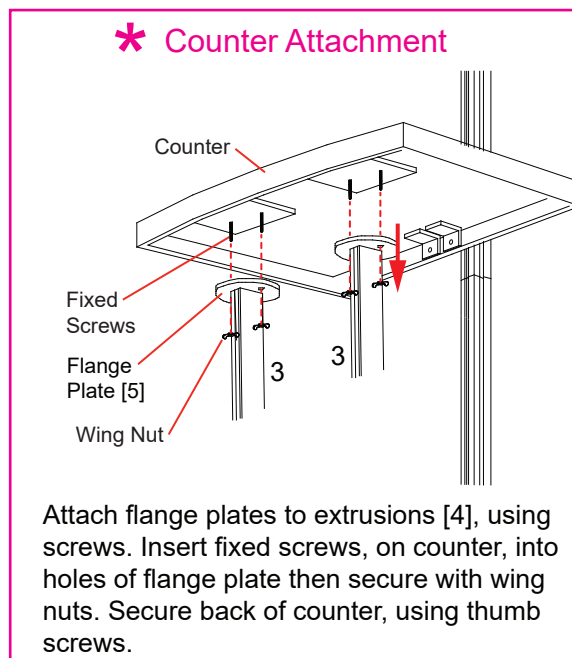



| Item | Qty. | Description |
|------|------|--|
| 1 | 1 | Base Plate |
| 2 | 1 | 48" Q914 Vertical Extrusion |
| 3 | 2 | 38" Z45 Vertical Extrusion |
| 4 | 1 | 25" Q914 Vertical Extrusion w/ Cap, Clamps, and Connector |
| 5 | 2 | Flange Plate |
| -- | 3 | Shelf |

Steps:

- 1) Attach lower verticals [2] and [3] to base plate [1], using bolts.
- 2) Attach upper vertical [4] to lower vertical [2], using connector.
- 3) Attach shelves to vertical [2].
- 4) Attach large graphic to verticals [3], using screw caps.
See [Large Graphic Attachment](#) detail.
- 5) Attach flange plates [5] to tops of verticals [3], using bolt.
- 6) Attach counter to flange plates [5] vertical [2], using wing nuts and thumb screws. See [Counter Attachment](#) detail.
- 7) Attach small and curved graphics to [4], using A10 clamps.
See [A10 Clamp](#) detail.
- 8) Attach monitor mount to [4]. See [Monitor Mount](#) detail.

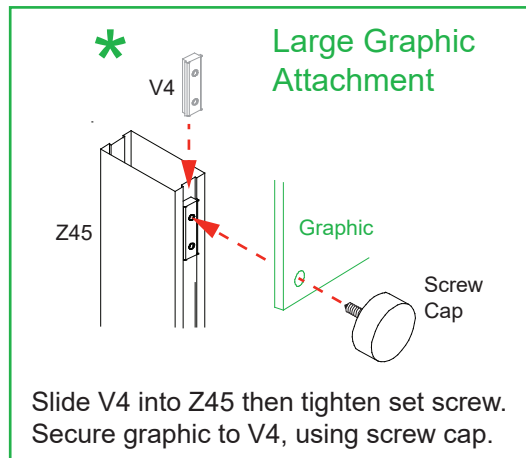

Completed Assembly

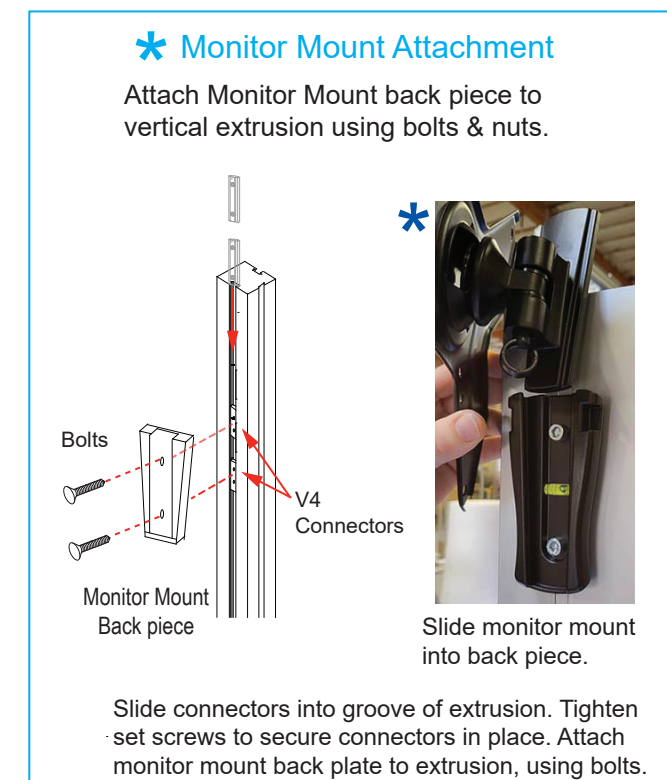

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts:
Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials.
All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

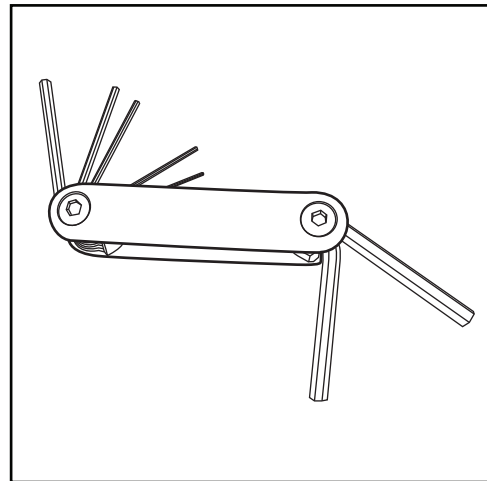


Hex Tool - Essential for Assembly

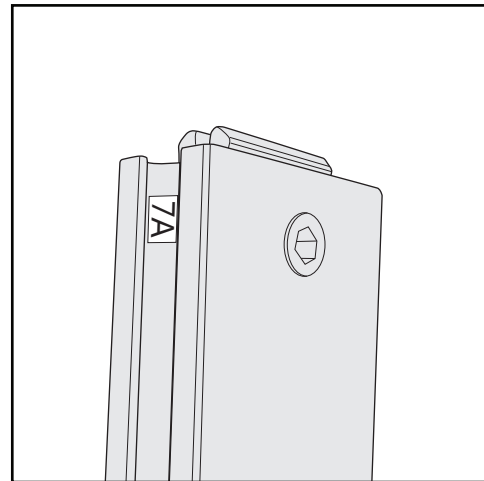


Part Identification - Numbering

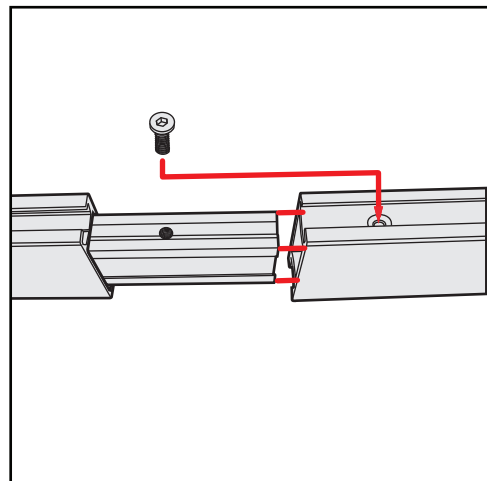


Spline Connection

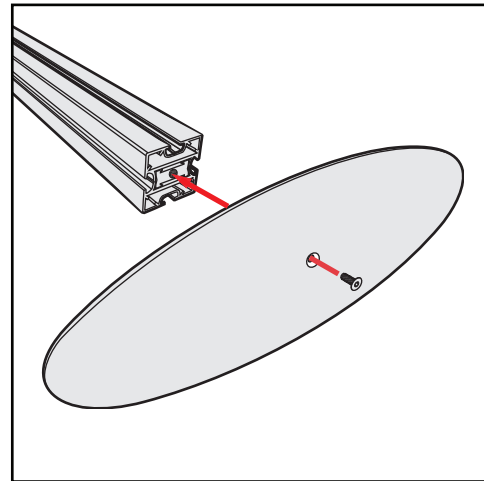

Base Plate & Extrusion Connection

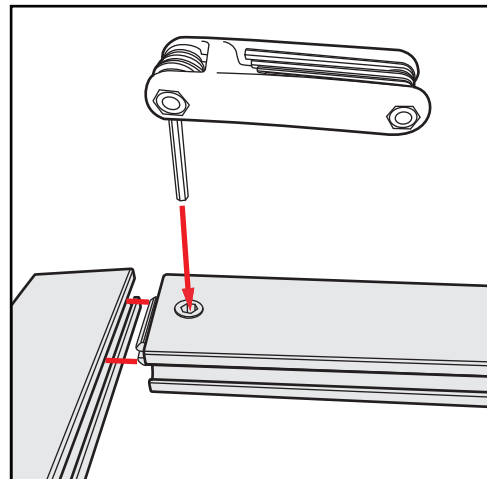

Extrusion & Lock Connection

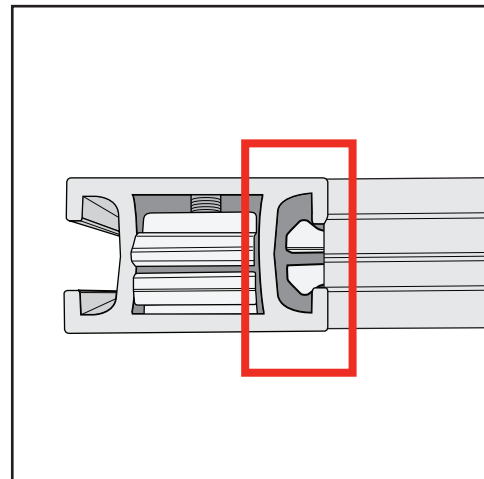

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Top View of Each Level

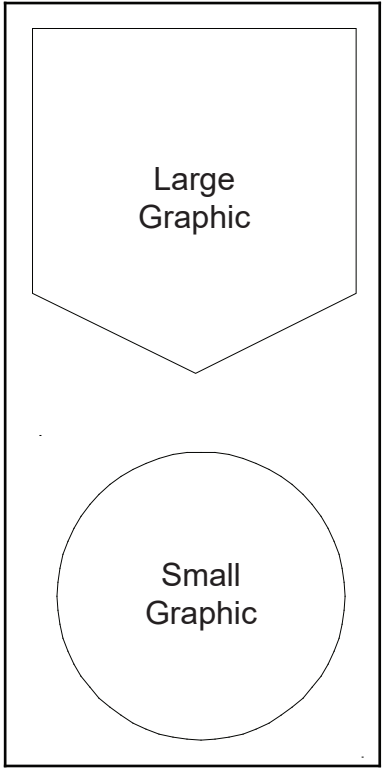


Level 1

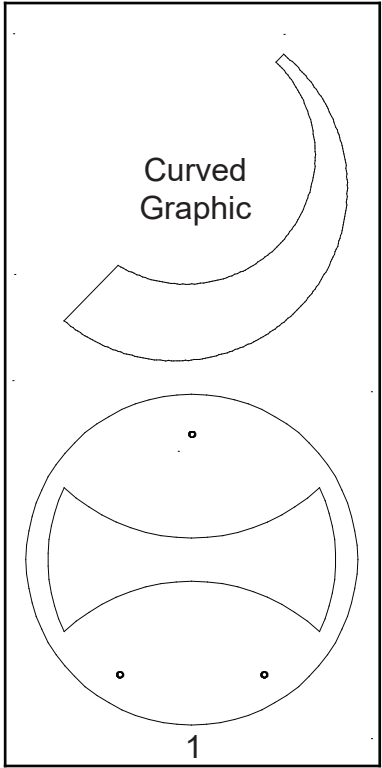


Level 2

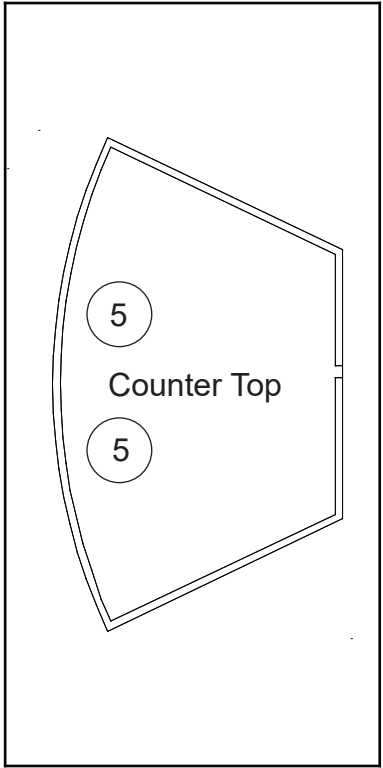

Level 3

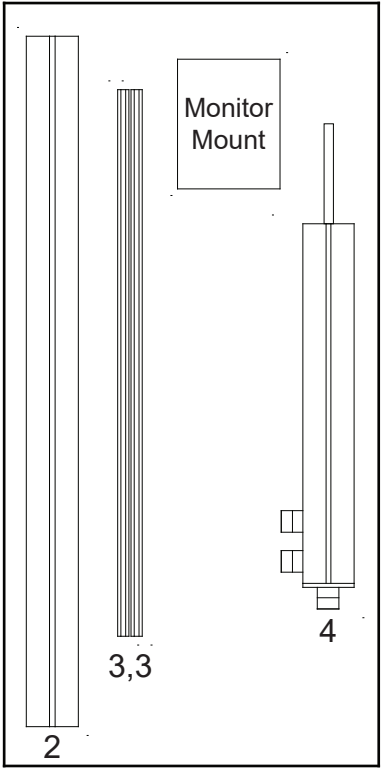

Level 4

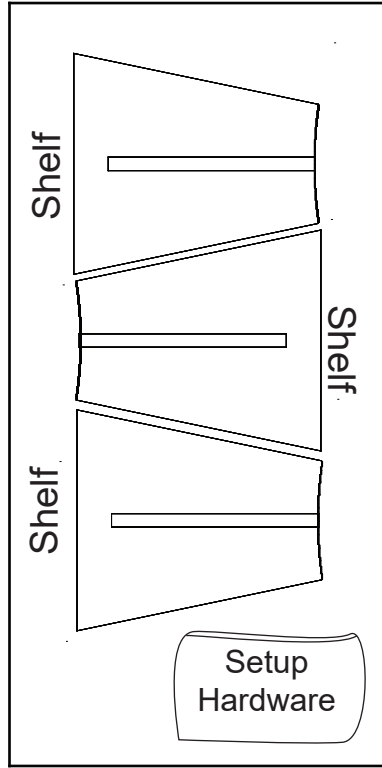

Level 5